


## KETTINGWIELEN - SIMPLEX

Voor rollenketting 10B-1

Vlg. Din 8187

5/8" x 3/8"

Tanden aantal	Boring		Naaf afmeting		Steek cirkel	Kop cirkel	Gewicht ca. kg	Artikel code
	D1 mm	max. mm	Dm mm	A mm	Dp mm	De mm		
8	10	16	25	25	41,48	48,40	0,12	K10B-1 08T-H
9	10	19	30	25	46,42	53,30	0,16	K10B-1 09T-H
10	10	23	35	25	51,37	58,30	0,22	K10B-1 10T-H
11	12	24	37	30	56,35	63,20	0,29	K10B-1 11T-H
12	12	27	42	30	61,34	68,20	0,37	K10B-1 12T-H
13	12	31	47	30	66,33	73,20	0,46	K10B-1 13T-H
14	12	34	52	30	71,34	78,20	0,56	K10B-1 14T-H
15	12	37	57	30	76,36	83,20	0,67	K10B-1 15T-H
16	14	40	60	30	81,37	88,30	0,76	K10B-1 16T-H
17	14	43	60	30	86,39	93,30	0,88	K10B-1 17T-H
18	14	47	70	30	91,42	98,30	1,01	K10B-1 18T-H
19	14	50	70	30	96,45	103,30	1,15	K10B-1 19T-H
20	14	50	75	30	101,48	108,40	1,21	K10B-1 20T-H
21	16	50	75	30	106,51	113,40	1,35	K10B-1 21T-H
22	16	53	80	30	111,55	118,40	1,41	K10B-1 22T-H
23	16	53	80	30	116,58	123,50	1,47	K10B-1 23T-H
24	16	53	80	30	121,62	128,50	1,54	K10B-1 24T-H
25	16	53	80	30	126,66	133,60	1,60	K10B-1 25T-H
26	20	56	85	35	131,70	138,60	1,96	K10B-1 26T-H
27	20	56	85	35	136,74	143,60	2,04	K10B-1 27T-H
28	20	60	90	35	141,78	148,70	2,25	K10B-1 28T-H
29	20	60	90	35	146,83	153,70	2,33	K10B-1 29T-H
30	20	60	90	35	151,87	158,80	2,41	K10B-1 30T-H
31	20	63	95	35	156,92	163,80	2,64	K10B-1 31T-H
32	20	63	95	35	161,96	168,90	2,73	K10B-1 32T-H
33	20	63	95	35	167,01	173,90	2,82	K10B-1 33T-H
34	20	63	95	35	172,05	178,90	2,92	K10B-1 34T-H
35	20	63	95	35	177,10	184,00	3,01	K10B-1 35T-H
36	20	66	100	35	182,15	189,00	3,27	K10B-1 36T-H
37	20	66	100	35	187,19	194,10	3,37	K10B-1 37T-H
38	20	66	100	35	192,24	199,10	3,47	K10B-1 38T-H
39	20	66	100	35	197,29	204,20	3,58	K10B-1 39T-H
40	20	66	100	35	202,34	209,20	3,69	K10B-1 40T-H
42	20	66	100	40	212,43	220,80	4,73	K10B-1 42T-H
45	20	66	100	40	227,58	236,00	5,09	K10B-1 45T-H
46	20	66	100	40	232,63	241,00	5,19	K10B-1 46T-H

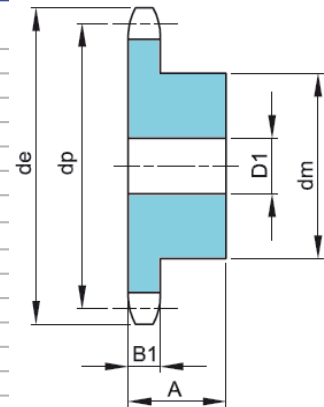

Ook afwijkende tandenaantallen op voorraad, specificaties op aanvraag.

Steek	P	=	15,875 mm
Binnenbreedte	E	=	9,650 mm
Roldiameter	D3	=	10,16 mm
Tandbreedte	B1	=	9,100 mm

materiaal: staal C45


## KETTINGWIELEN - SIMPLEX

Voor rollenketting 10B-1

Vlg. Din 8187

5/8" x 3/8"

Tanden aantal	Boring		Naaf afmeting		Steek cirkel	Kop cirkel	Gewicht ca. kg	Artikel code
	D1 mm	max. mm	Dm mm	A mm	Dp mm	De mm		
48	20	66	100	40	242,73	251,10	5,43	K10B-1 48T-H
50	20	66	100	40	252,82	261,20	5,70	K10B-1 50T-H
51	20	66	100	40	257,87	266,30	5,85	K10B-1 51T-H
52	20	66	100	40	262,92	271,30	6,11	K10B-1 52T-H
53	20	66	100	40	267,97	276,40	6,25	K10B-1 53T-H
54	20	66	100	40	273,03	281,40	6,31	K10B-1 54T-H
55	20	66	100	40	278,08	286,50	6,40	K10B-1 55T-H
56	25	66	100	40	283,13	291,50	6,52	K10B-1 56T-H
57	25	66	100	40	288,18	296,60	6,66	K10B-1 57T-H
60	25	66	100	50	303,33	311,70	7,15	K10B-1 60T-H
65	25	66	100	50	328,58	337,00		K10B-1 65T-H
70	25	66	100	50	353,84	362,20		K10B-1 70T-H
72	25	66	100	50				K10B-1 72T-H
76	25	66	100	50	384,15	392,50	10,28	K10B-1 76T-H
80	25	66	100	50	404,35	412,70		K10B-1 80T-H
95	30	66	100	60	480,14	488,50	16,36	K10B-1 95T-H
114	30	66	100	60	576,13	584,50		K10B-1 114T-H

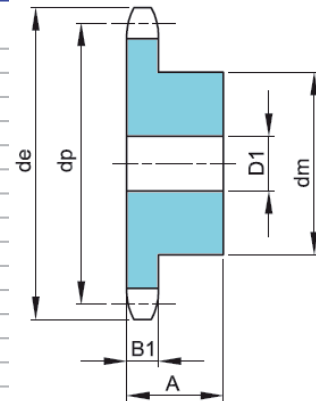

Ook afwijkende tandenaantallen op voorraad, specificaties op aanvraag.

Steek	P	=	15,875 mm
Binnenbreedte	E	=	9,650 mm
Roldiameter	D3	=	10,16 mm
Tandbreedte	B1	=	9,100 mm

materiaal: staal C45