


## KETTINGWIELEN - DUPLEX

Voor rollenketting 08B-2

Vlg. Din 8187

1/2" x 5/16"

Tanden aantal	Boring		Naaf afmeting		Steek cirkel	Kop cirkel	Gewicht ca. kg	Artikel code
	Z	D2 mm	max. mm	Dm mm	A mm	Dp mm		
8	10	13	20	32	33,18	38,00	0,09	K08B-2 08T-H
9	10	15	24	32	37,13	42,00	0,13	K08B-2 09T-H
10	10	18	28	32	41,10	45,90	0,18	K08B-2 10T-H
11	12	21	32	35	45,07	49,90	0,24	K08B-2 11T-H
12	12	23	35	35	49,07	53,90	0,30	K08B-2 12T-H
13	12	25	38	35	53,06	57,90	0,36	K08B-2 13T-H
14	12	27	42	35	57,07	61,90	0,44	K08B-2 14T-H
15	12	31	46	35	61,09	65,90	0,52	K08B-2 15T-H
16	14	33	50	38	65,10	69,90	0,63	K08B-2 16T-H
17	14	35	54	38	69,11	74,00	0,73	K08B-2 17T-H
18	14	38	58	38	73,14	78,00	0,85	K08B-2 18T-H
19	14	41	62	38	77,16	82,00	0,97	K08B-2 19T-H
20	14	44	66	38	81,19	86,00	1,10	K08B-2 20T-H
21	16	47	70	40	85,22	90,10	1,29	K08B-2 21T-H
22	16	47	70	40	89,24	94,10	1,37	K08B-2 22T-H
23	16	47	70	40	93,27	98,10	1,46	K08B-2 23T-H
24	16	50	75	40	97,29	102,10	1,64	K08B-2 24T-H
25	16	53	80	40	101,33	106,20	1,82	K08B-2 25T-H
26	16	56	85	40	105,36	110,20	2,02	K08B-2 26T-H
27	16	56	85	40	109,40	114,20	2,12	K08B-2 27T-H
28	16	60	90	40	113,42	118,30	2,34	K08B-2 28T-H
29	16	63	95	40	117,46	122,30	2,56	K08B-2 29T-H
30	16	66	100	40	121,50	126,30	2,79	K08B-2 30T-H
31	20	66	100	40	125,54	130,40	2,87	K08B-2 31T-H
32	20	66	100	40	129,56	134,40	3,00	K08B-2 32T-H
33	20	66	100	40	133,60	138,40	3,13	K08B-2 33T-H
34	20	66	100	40	137,64	142,50	3,26	K08B-2 34T-H
35	20	66	100	40	141,68	146,50	3,40	K08B-2 35T-H
36	20	66	100	40	145,72	150,60	3,54	K08B-2 36T-H
37	20	66	100	40	149,76	154,60	3,69	K08B-2 37T-H
38	20	66	100	40	153,80	158,60	3,84	K08B-2 38T-H
39	20	66	100	40	157,83	162,70	4,00	K08B-2 39T-H
40	20	66	100	40	161,87	166,70	4,15	K08B-2 40T-H
42	20	73	110	50	169,95	176,50	5,67	K08B-2 42T-H
45	20	73	110	50	182,07	188,60	6,26	K08B-2 45T-H
46	20	73	110	50	186,10	192,60	6,39	K08B-2 46T-H

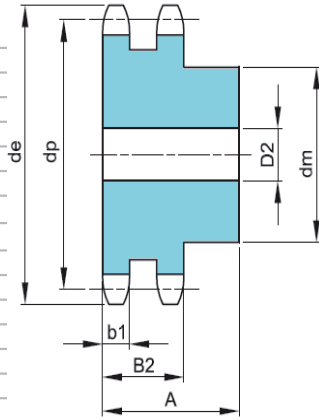

Ook afwijkende tandenaantallen op voorraad, specificaties op aanvraag.

Steek	P	= 12,70 mm
Binnenbreedte	E	= 7,750 mm
Roldiameter	D3	= 8,510 mm
Tandbreedte	b1	= 7,000 mm
	B2	= 21,00 mm

materiaal: staal C45


## KETTINGWIELEN - DUPLEX

Voor rollenketting 08B-2

Vlg. Din 8187

1/2" x 5/16"

Tanden aantal	Boring		Naaf afmeting		Steek cirkel	Kop cirkel	Gewicht ca. kg	Artikel code
	D2 mm	max. mm	Dm mm	A mm	Dp mm	De mm		
48	20	73	110	50	194,18	200,70	6,75	K08B-2 48T-H
50	20	73	110	50	202,26	208,80	7,17	K08B-2 50T-H
51	20	73	110	50	206,30	212,80	7,34	K08B-2 51T-H
52	20	73	110	50	210,34	216,90	7,57	K08B-2 52T-H
53	20	73	110	50	214,37	220,90	7,72	K08B-2 53T-H
54	20	73	110	50	218,43	225,00	7,99	K08B-2 54T-H
55	20	73	110	50	222,46	229,00	8,18	K08B-2 55T-H
56	25	73	110	50	226,50	233,00	8,32	K08B-2 56T-H
57	25	73	110	50	230,54	237,10	8,65	K08B-2 57T-H
60	25	73	110	50	242,66	249,20	9,35	K08B-2 60T-H
70	25	73	110	56	283,07	289,60	11,89	K08B-2 70T-H
76	25	73	110	56	307,33	313,90	13,30	K08B-2 76T-H
95	25	73	110	56	384,11	390,70	21,13	K08B-2 95T-H
114	25	73	110	56	460,90	467,40	27,00	K08B-2 114T-H

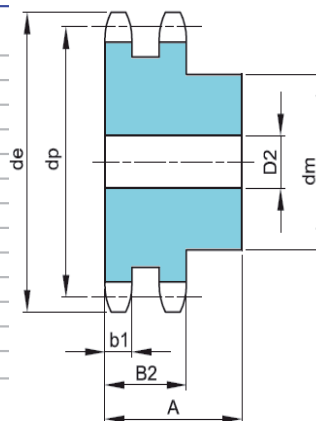

Ook afwijkende tandenaantallen op voorraad, specificaties op aanvraag.

Steek	P	=	12,70 mm
Binnenbreedte	E	=	7,750 mm
Roldiameter	D3	=	8,510 mm
Tandbreedte	b1	=	7,000 mm
	B2	=	21,00 mm

materiaal: staal C45